Wire transport for high-alloy steel wires and non-ferrous alloys

MIGAL.CO

For wire diameters up to 2.4 mm. Without wire feeding device (DLDA1, RoboFeed): Sum of the radii of the conduit ≤ 360°, Length ≤ 5 m • With wire feeding device: Sum of the radii ≤ 1.800°, Length ≤ 50 m

Without wire feeding device: Sum of the radii of the conduit ≤ 1.300°, Length ≤ 25 m • With wire feeding device: Sum of the radii ≤ 2.500°, Length ≤ 75 m

For wire diameters up to 1.6 mm.

Sum of the radii of the conduit ≤ 1.300°, Length ≤ 25 m

For wire diameters up to 4 mm.

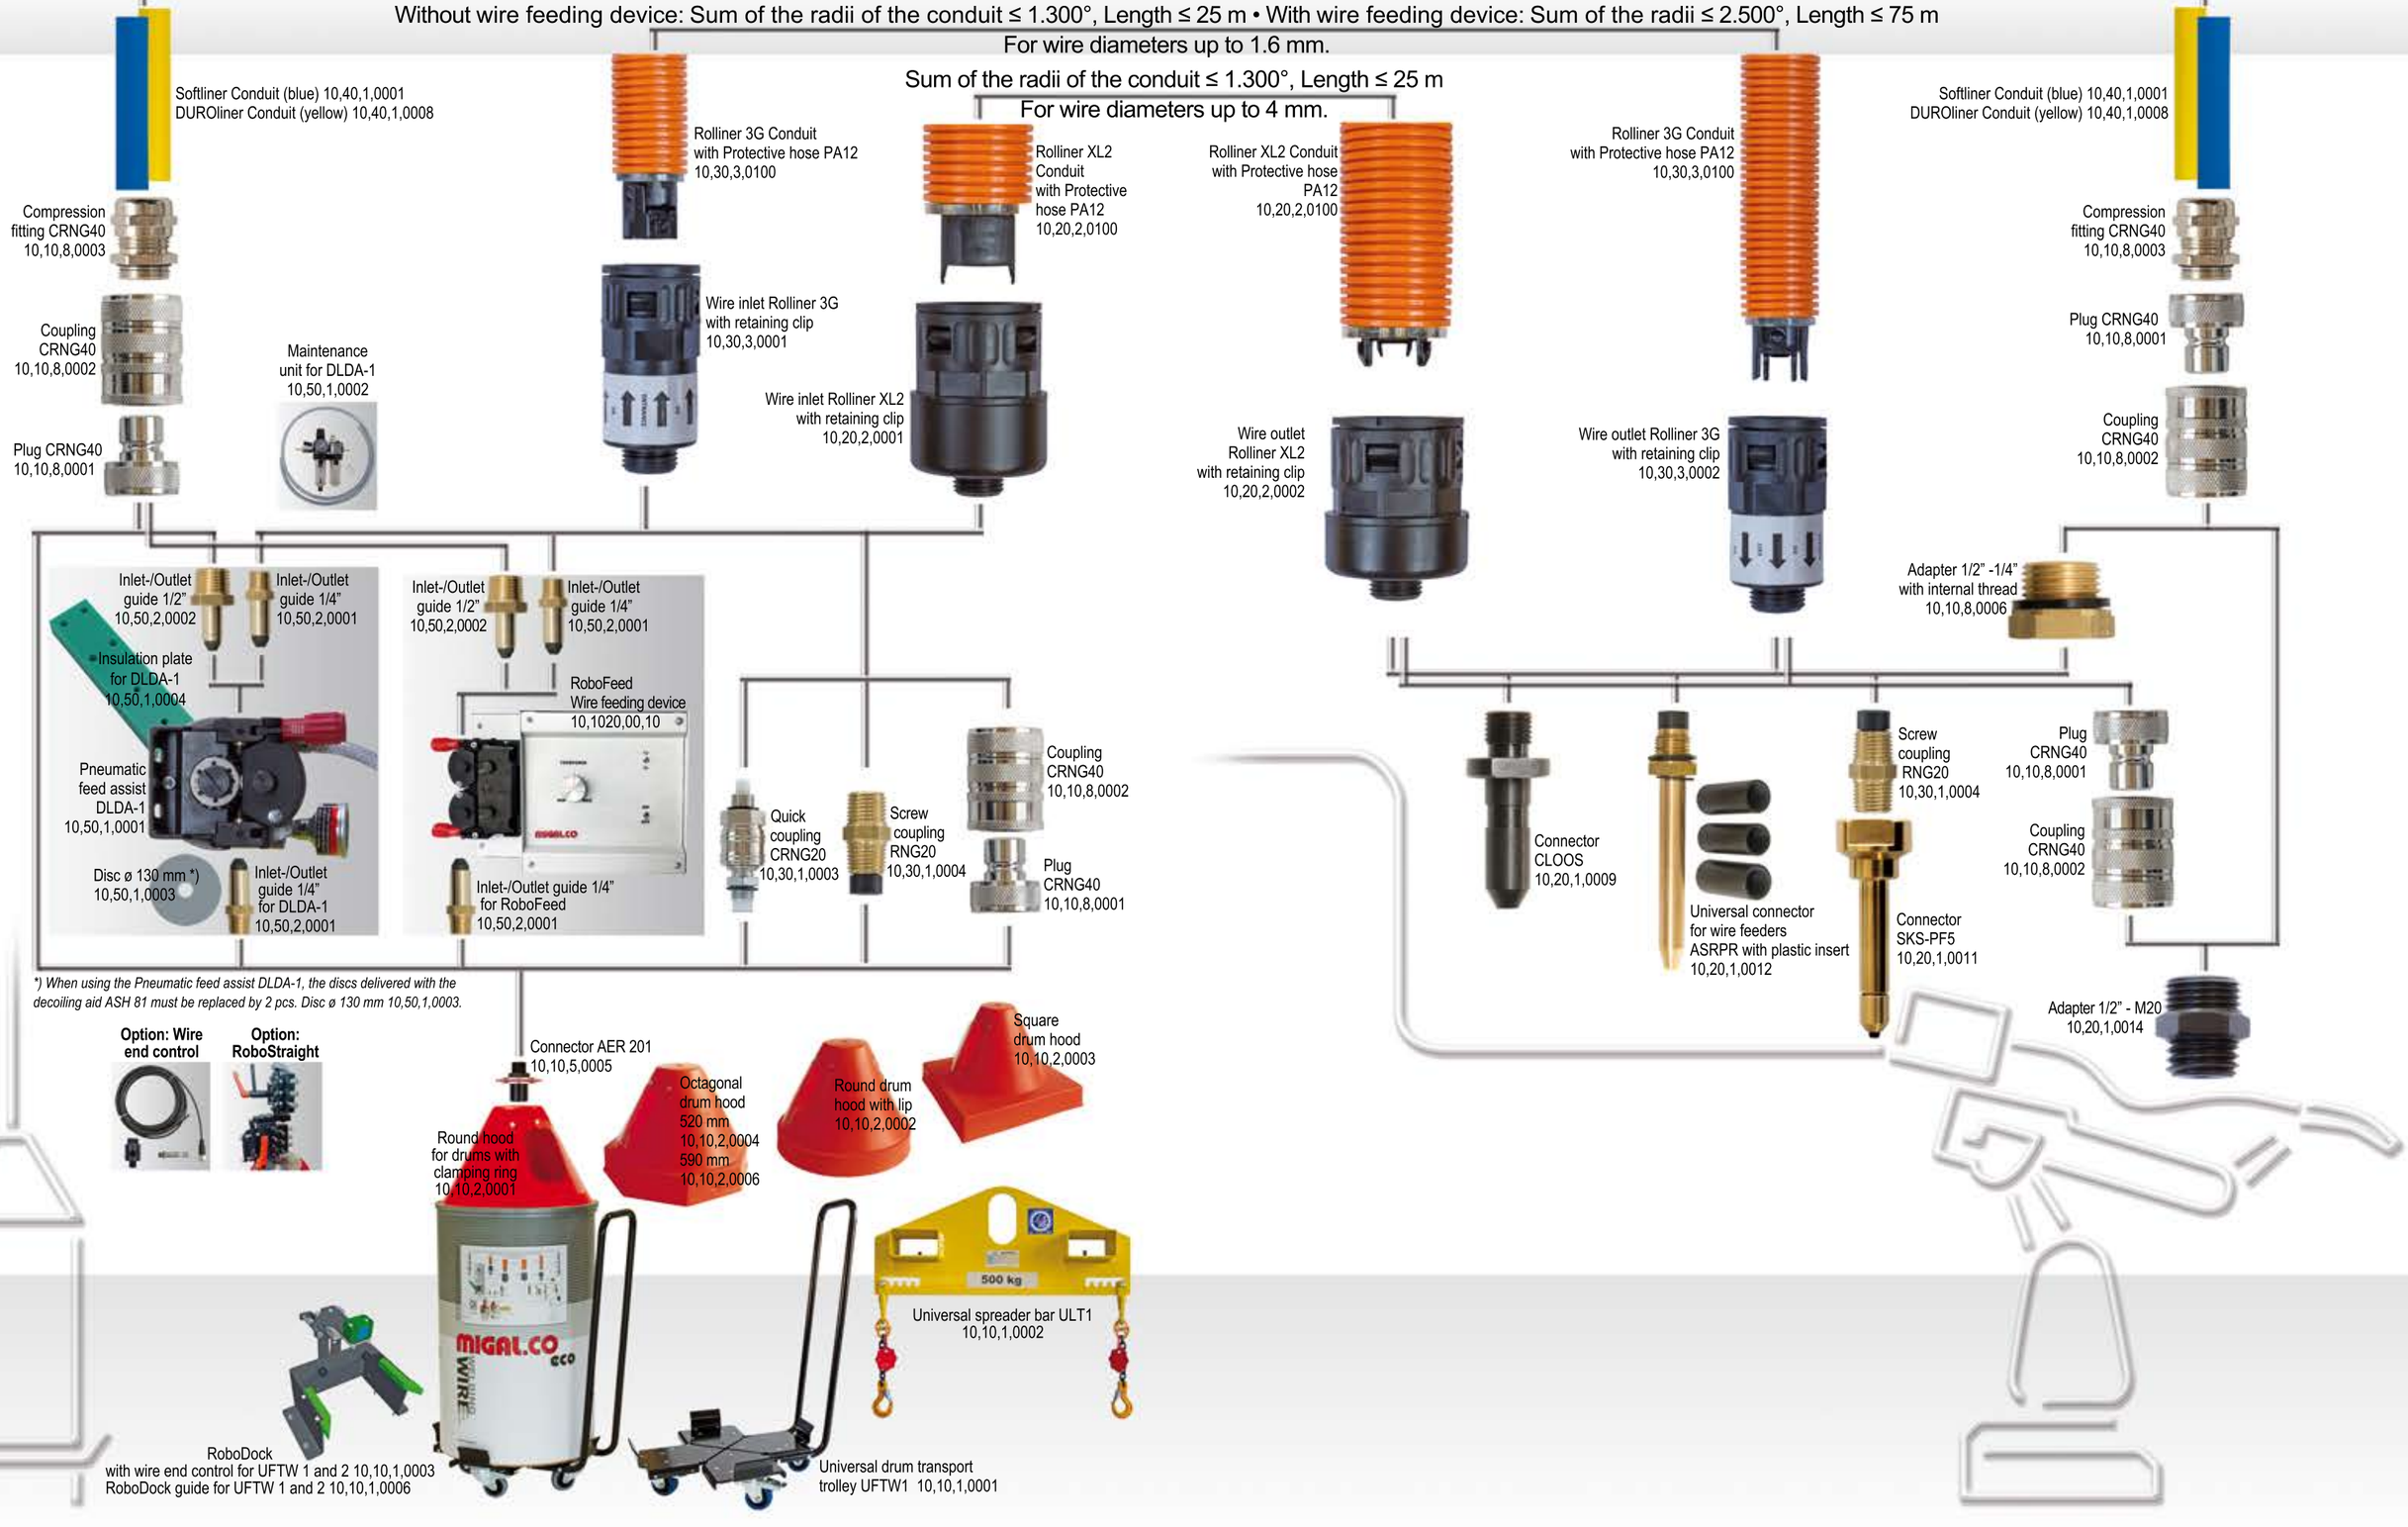

*) When using the Pneumatic feed assist DLDA-1, the discs delivered with the decoiling aid ASH 81 must be replaced by 2 pcs. Disc ø 130 mm 10,50,1,0003.